





IV . ENGINE

8. Carburetor


B. INSPECTION

• Float Height

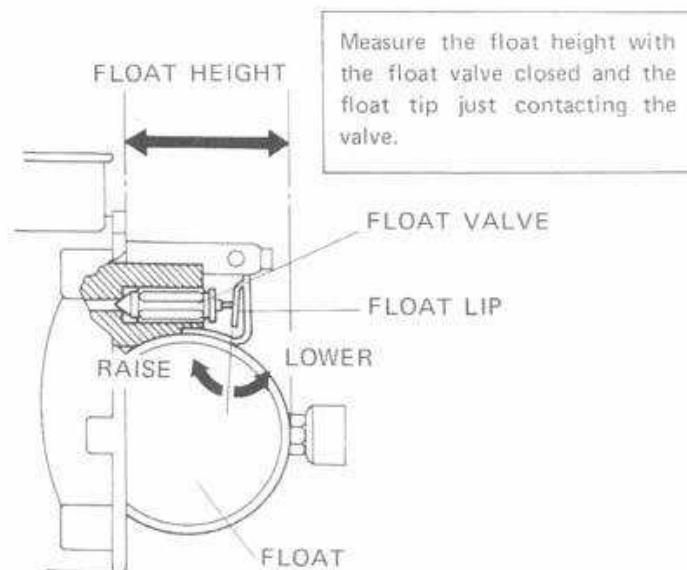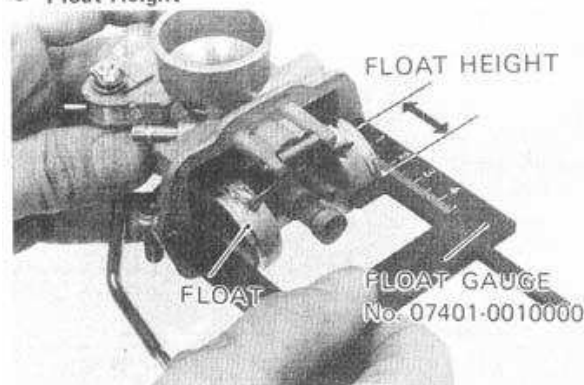

K-134558

• Float Valve



Check for wear on seat contacting face.

K-090563

• Bend the float lip carefully to adjust the float level.

• Carburetor Setting

Model	CB50J		XL50	
	General Type	Belgian, Austrian and German Type	General Type	Belgian, Austrian and German Type
Setting Mark	O7A	A13A	O8B	A14A
Main jet	#85	#65	#75	#62
Slow jet	#38	#35	#35	#35
Jet needle setting	 2nd Standard Rich	3rd	2nd	2nd
Air screw opening	1½	1½	1¼	1½
Float height	20 mm (0.7874 in)	21.5 mm (0.8465 in)	20 mm (0.7874 in)	20 mm (0.7874 in)
Idle speed	1,500 rpm	1,500 rpm	1,500 rpm	1,500 rpm

K-149541